



72LVS, 96LVS, 72LVS-1, 96LVS-1

For measuring AC voltages in 4-wire networks by using a change over switch displayed on the front side of the instrument. The error-display LED is indicating in case of phase drop out.

Technical data

Movement: Moving-iron movement with spring-type oil filled bearings, practically vibration-free oil damping.

Class of accuracy: $\pm 1.5\%$

Permanent overload: 1.2 - fold voltage.

Scale length: see table

Frequency range: 15 ... 50 ... 100 Hz.

Instrument case: see table

Weight: max. 0.4 kg for types 72 LVS, 72LVS-1
max. 0.5 kg for types 96LVS, 96LVS-1



Fixing elements: plastic clips or two spring-type fastening clips (DIN 43835 "A") for metal case instruments



Positions:	OFF L1-L2 L2-L3 L1-L3 L1-N L2-N L3-N +ERROR	OFF L1-L2 L2-L3 L1-L3 L1-N L2-N L3-N	OFF L1-L2 L2-L3 L1-L3 L1-N L2-N L3-N +ERROR	OFF L1-L2 L2-L3 L1-L3 L1-N L2-N L3-N				
Measuring range	Plastic case ■				Metal case			
	Scale length:							
	41 mm	75 mm	41 mm	75 mm	50 mm	75 mm	50 mm	75 mm
	Frame dimensions (a)							
	72x72 mm	96x96 mm	72x72 mm	96x96 mm	72x72 mm	96x96 mm	72x72 mm	96x96 mm
72 LVS Cat. No. 2550-13- ...	96 LVS Cat. No. 2551-13- ...	72 LVS-1 Cat. No. 2550-13- ...	96 LVS-1 Cat. No. 2551-13- ...	72 LVS Cat. No. 2119-13- ...	96 LVS Cat. No. 2116-13- ...	72 LVS-1 Cat. No. 2119-13- ...	96 LVS-1 Cat. No. 2116-13- ...	
60 / 100 V	001	001	011	011	001	001	011	011
80 / 150 V	002	002	012	012	002	002	012	012
100 / 200 V	003	003	013	013	003	003	013	013
150 / 250 V	004	004	014	014	004	004	014	014
250 / 400 V	005	005	015	015	005	005	015	015
■ 300 / 500 V	006	006	016	016	006	006	016	016
360/600V	007	007	017	017	007	007	017	017


■ standard

Note: On request orders for types different from table are accepted.

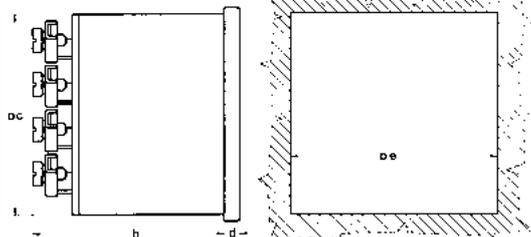

Type	Dimensions (in mm.)				
	a	b	c	d	e
72 LVS, 72LVS-1	72	54	66	5	68 ^{+0.7}
96 LVS, 96LVS-1	96	54	90	5	92 ^{+0.8}

Scale 72LVS

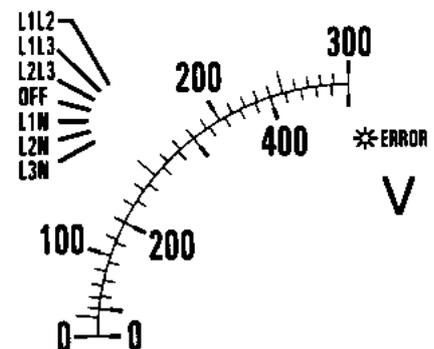

Order specification:

-Moving-iron voltmeter with change over switch.
-Frame dimensions: **96x96 mm**
-Voltage range: **300 / 500 V**
Option: 1 scale **500V**

Ordering data:

-Moving-iron voltmeter with change over switch.
-Type: **96 LVS**
-Cat. No. **2551-13-006**



GRUBER Electric Ges.m.b.H.

A-2542 KOTTINGBRUNN, INDUSTRIESTRASSE 4
Tel. +43-2252-251080-0 / Fax +43-2252-251080-30
Internet: www.gruber-electric.at Email: office@gruber-electric.at
Komponenten für Steuerungsbau und Industrieelektronik